Dear Customer

Thank you for purchasing this product !
For optimum performance and safety, please read these instructions carefully before connecting. Operating or adjusting this product. Please keep this manual for future reference.

Basic Function :

CBH7016.....Dimension:110x75x23.5mm

- HDMI Extender over single Cat5e/6
- 70m long extension over HDBase-T technology
- 6 level Daisy Chain for multi-place installation
- IR backward and forward
- 70m Extension for HDMI
- 10.2Gbps transport capacity over HDBase-T
- 3D support

Specification :

HDMI version .....High Speed with 3D
HDCP version.....HDCP1.2
Support HDMI resolution..... 1080P/1080i/720P/576P/576i/480P/480i
Support video color bit ..... deep color 24bit/36bit
Support audio format..... LPCM/Dolby-AC3/DTS7.1/DSD
Input Video signal .....1.0Volts P-P
Output cable distance..... ≤5m
Input cable distance..... ≤5m
Data transfer speed..... 6.75Gbps-10.2Gbps
Operating Humidity range..... 5 to 90%RH (No Condensation)
Operating Temperature range..... -15 to +55C° (5 to 131°F)
Power adapter format.....Input AC(50Hz.60Hz) 100-240V
Power Supply.....DC 5V

Operation:

1.Connect the signal source (such as HD-DVD, PS3, STB) with HDMI input interfaces.
2.Connect the display devices (such as HD-LCD, HD-DLP) with HDMI output interfaces.
3.Connect one long CAT5e/6 cable to the sender output socket.
4.Connect one long CAT5e/6 cables to the Receiver input socket.
5.Connect LCD with HDMI interface to Receiver output socket.
6.This device is powered by an external power supply optional.

Application :

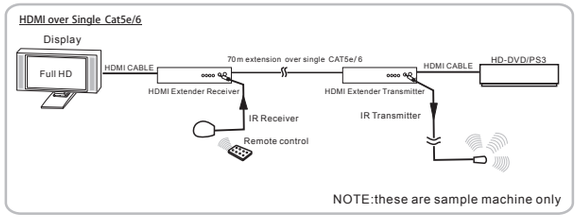

Package Included:

When first unpacking your HDMI extender please check to see if the following items are included:

- HDMI extender Transmitter and Receiver
- 5V DC power supply x 2
- User manual

Warning:

TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK OR PRODUCT DAMAGE:

1. Do not expose this apparatus to rain, moisture, dripping or splashing and make sure that no objects filled with liquids, such as vases, are placed on the apparatus.
2. Do not install or place this unit in a bookcase, built-incabinet or in another confined space. Ensure the unit is well ventilated.
3. To prevent risk of electric shock or fire hazard due to overheating, do not obstruct the unit's ventilation openings with newspapers, tableclothes, curtains and similar items.
4. Do not install near any heat sources such as radiators, heat registers, Stoves or other apparatus.
5. Do not place sources of naked flames, such as lighted candles on the unit.
6. Clean this apparatus only with dry cloth.
7. Unplug this apparatus during lighting storms or when unused for long time.
8. Protect the power cord from being walked on or pinched, particularly at plugs.
9. Only use attachments/accessories specified by the manufacture.
10. Refer all servicing to qualified service personnel.

Quality Guarantee:

- This Limited Warranty only covers failures due to defects in materials or workmanship, and does not cover normal wear and tear or cosmetic damage. The Limited Warranty also does not cover damages which occurred in shipment, or failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, abuse, neglect,mishandling, misapplication, alteration, faulty installation, set-up adjustments, misapplication, alteration, faulty installation, set-up adjustments, maladjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Service, or damage that is attributable to acts of God.
- There are no express warranties except as listed under “limited warranty coverage”. the warrantor is not liable for incidental or consequential damages resulting from the use of this product, or arising out of any breach of this warranty. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.)
- No damage caused by accident, One year warranty for free repair and half way free transport.

Manuel d’utilisation

KIT D’EXTENSION HDMI via cordon RJ45 Cat5e/6 - 70m

CBH7016

Cher client

Merci d'avoir choisi ce produit. Pour une utilisation optimisée et sécurisée de l'appareil, lire attentivement ces instructions avant la connexion et la mise en service de ce produit. Conserver ce mode d'emploi pour une utilisation future.

Caracteristiques :

CBH7016..... Dimensions : 110x75x23.5mm

- Kit d'extension HDMI via cordon RJ45 Cat5e/6
- Extension jusqu'à 70m grâce à la technologie HDBase-T
- Cascadable maxi 6 fois (6 x 70m)
- Transmetteur et récepteur infrarouge
- Transfert des données 10.2Gbps
- Compatible 3D

Specificites :

Version HDMI .....Haute vitesse avec 3D
Version HDCP.....HDCP1.2
Compatible résolutions HDMI 1080P/1080i/720P/576P/576i/480P/480i
Compatible format couleur vidéo ..... deep color 24bit/36bit
Compatible format audio LPCM/Dolby-AC3/DTS7.1/DSD
Entrée signal vidéo .....1.0Volts P-P
Distance de câble en sortie ..... ≤5m
Distance de câble en entrée ..... ≤5m
Vitesse de transfert des données 6.75Gbps-10.2Gbps
Plage du niveau d'humidité opérationnel ..... 5 to 90%RH (sans condensation)
Plage des températures de fonctionnement ..... -15 to +55C° (5 to 131°F)
Caractéristiques du bloc d'alimentation .....Entrée AC(50Hz.60Hz) 100- 240V
Bloc d'alimentation .....DC 5V

Installation :

1. Connectez l'appareil source (tel que lecteur DVD, PS3, STB) au boîtier transmetteur.
2. Connectez l'appareil de destination (tel qu'un écran) au boîtier récepteur.
3. Connectez un câble RJ45 CAT5e/6 au boîtier transmetteur.
4. Connectez l'autre extrémité du câble RJ45 CAT5e/6 au boîtier récepteur.
5. Les boîtiers transmetteur et récepteur sont alimentés par un bloc d'alimentation (fournis).

Application :

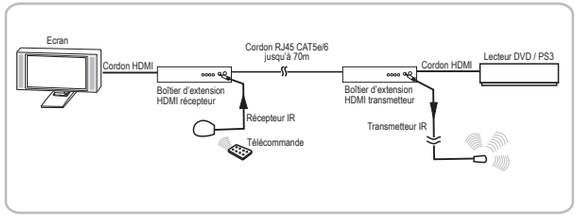

Contenu :

Lors de la première ouverture du pack, merci de vérifier que les articles suivants sont inclus :

- un boîtier transmetteur + transmetteur IR
- un boîtier récepteur + récepteur IR
- 2 blocs d'alimentation 5V DC
- manuel d'utilisation

Attention :

AFIN DE RÉDUIRE LES RISQUES D'INCENDIE, DE COURTS-CIRCUITS ET DE DÉTÉRIORATION DE L'APPAREIL :

1. Ne pas exposer l'appareil à la pluie, la moisissure, les éclaboussures et ne pas placer à proximité d'objets contenant du liquide tel que des vases ou autres
2. Ne pas installer cet appareil dans une bibliothèque ou autre meuble fermé. S'assurer que le matériel bénéficie d'une bonne ventilation
3. Afin d'éviter tous chocs électriques ou incendie dus à une élévation de la température, ne pas obstruer les ouvertures de ventilation par des journaux, linge de maison, rideaux ou autres
4. Ne pas installer à proximité de sources de chaleur tel que des radiateurs
5. Ne pas placer cet appareil à proximité d'une cheminée ou bougie
6. Nettoyer cet appareil uniquement avec un chiffon sec
7. Débrancher tous les périphériques de votre appareil en cas d'orage ou de longue période sans utilisation
8. Protéger les cordons d'alimentation afin de ne pas marcher dessus ou les détériorer
9. N'utiliser que les accessoires fournis avec ce produit
10. Pour tous compléments d'informations et interventions, prendre contact avec un service après vente qualifié

Limites de garantie :

La garantie ne couvre que les dommages dus à des défauts matériels ou de fabrication.
La garantie ne couvre pas les dommages causés par le transport, ou les défauts causés par des produits qui ne sont pas fournis par le fabricant, ou des défauts dus à un accident, une mauvaise utilisation ou manipulation, un manque d'entretien, une modification du produit, une faute d'installation, un dommage électrique, la foudre, ou une action réalisée sur le produit par une personne autre qu'un service agréé par le fabricant.

User manual

HDMI EXTENDER OVER SINGLE Cat5e/6 - 70m

CBH7016